

**Vision Proof Louver Screen in 6" deep - Model IEC-06**

**Design Features** – Inverted 45° angle straight blade design ideal for concealing mechanical equipments.

**STANDARD CONSTRUCTION**

ALL MATERIAL – EXTRUDED ALUMINUM 6063-T5 (KB-45)

**BLADES**

6" (152) deep, .081" (2.1) extruded aluminum, approx spacing is 7" (178) o.c. @ 45°

**SUPPORTS**

Blades are snapped-in (locked) into .125" (3.2) thick extruded aluminum blade braces and mechanically secured to 2" (51) x 2" (51) x 1/4" (6) extruded aluminum angle @ maximum 60" (1524) on centers.

**FASTENERS**

Plated steel, tek screw

**MAXIMUM SIZE**

Unlimited, with mullions, structural bracing supplied by others

**MAXIMUM FACTORY ASSEMBLY SIZE**

120" w x 84 h" or 84" w x 120" h (3048 x 2134) or (2134 x 3048)  
 (allows for best handling)  
 (Type of finish may limit maximum single section)

**MULLION**

Invisible

**MINIMUM SIZE**


12"w x 12"h (305 x 305)

**UNDERSIZED**

1/4" (6) under ordered size unless specified Exact or Actual

**FINISH**

Mill

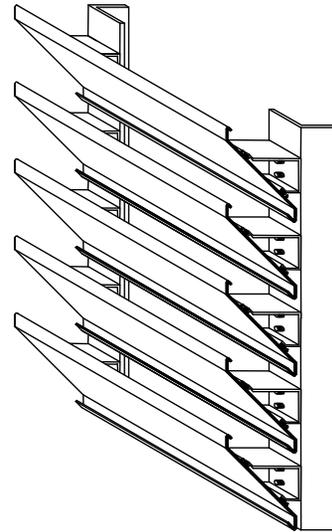

**OPTIONAL CONSTRUCTION**

**BLADES AND SUPPORTS** - Available in heavier extruded gauge

**FINISH** – Air-dry primer, polyurethane, epoxy, or enamel, baked epoxy or enamel, Kynar, or Powder coat.

**MULLION** – Visible for architectural preference

**CORNERS** – Mitered or Box


**SPECIAL PURPOSE CONSTRUCTION**

Special shapes: Triangle, Round, Trapezoid, etc.


Fully welded construction

Security bars


Hinged as walk through door or for swing out for access



Mitered Corner




Boxed Corner

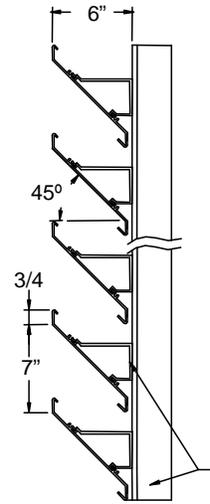

Vertical Section

Angle Support

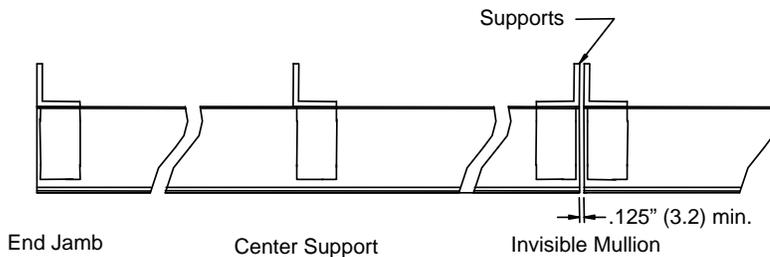

End Jamb

Center Support

Invisible Mullion

DATE	ARCHITECT			CUSTOMER
PROJECT				
ITEM	QTY	W	H	DESCRIPTION



*A division of Safe Air of Illinois*

DEPENDABLE PRODUCTS SINCE 1955

**DOWCO PRODUCTS GROUP**

*Engineering and General Offices*

1855 South 54<sup>th</sup> Avenue, Cicero, Illinois 60804

Phone 708-652-9100 FAX 708-652-9158