


**STANDARD CONSTRUCTION**


MODEL: V-DEM-05-3Q0T-L  
 FRAME: .081" THK. EXTRUDED ALUM. 6063-T5  
 BLADES: .081" THK. EXTRUDED ALUM. 6063-T5  
 FASTENERS: #10-16 X 1" PLTD. STL. TEK SCREW  
 SCREEN: ALUM. INSECT SCREEN IN FRAME  
 (MILL FINISH ONLY)  
 FINISH: KYNAR 500 3-STEP, STD. COLOR

**NOTES:**


1. ALL LOUVERS TO BE FABRICATED 1/4" UNDER LISTED OPNG. SIZES UNLESS SPECIFIED "ACTUAL".
2. ALL OPNG SIZES TO BE FIELD VERIFIED AND GUARANTEED BY OTHERS PRIOR TO FABRICATION.
3. OTHER SURROUNDING FINISHES ARE FOR REFERENCES ONLY AND TO BE SUPPLIED BY OTHERS.

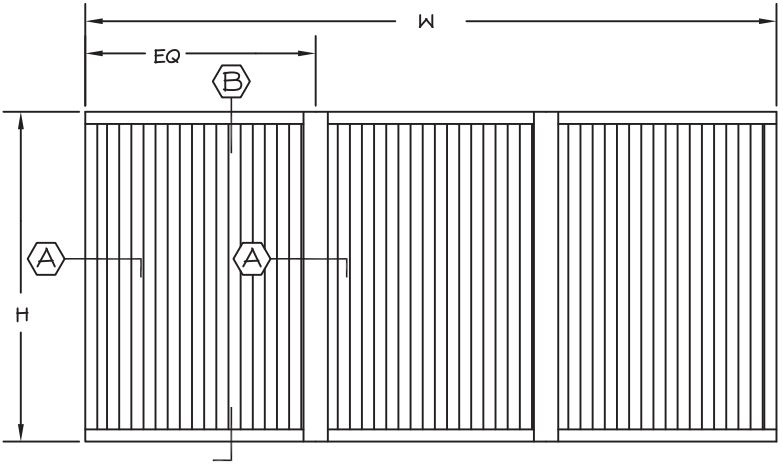

FRONT ELEVATION



SECTION "B"

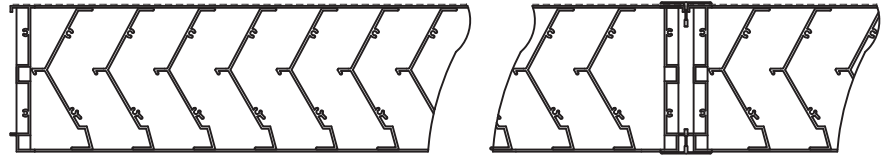

SECTION "A"

**DOWCOR** Products Group  
 1855 SOUTH 54TH AVENUE, CICERO, IL. 60650  
 DEPENDABLE PRODUCTS SINCE 1955

ARCH/ENGR: \_\_\_\_\_ CUSTOMER: \_\_\_\_\_

REV.	DESCRIPTION	DATE	BY	PROJECT:	TITLE:
					V-DEM-05
				DATE: _____	DRAWN: _____
				SCALE: 1:1	CHKD: _____
					DRWG #: