


Aluminum Grilles (Ephesia) - Model GBF-50 Series

STANDARD CONSTRUCTION

- FRAME**
2" to 6" deep, .080" to .125" thick aluminum (3003-H14)
- BLADES**
.080" to .25" thick extruded aluminum,
spacing – 2" to 12" modules @ 0 to 45 degrees slope.
- MAXIMUM SIZE**
Unlimited, structural bracing supplied by others
- MAXIMUM FACTORY ASSEMBLY SIZE**
84" x 120" or vice versa
- MINIMUM SIZE**
12" x 12"
- FASTENERS:**
Welded Construction
- UNDERSIZED**
1/4" under ordered size unless specified Exact or Actual
- FINISH**
Mill

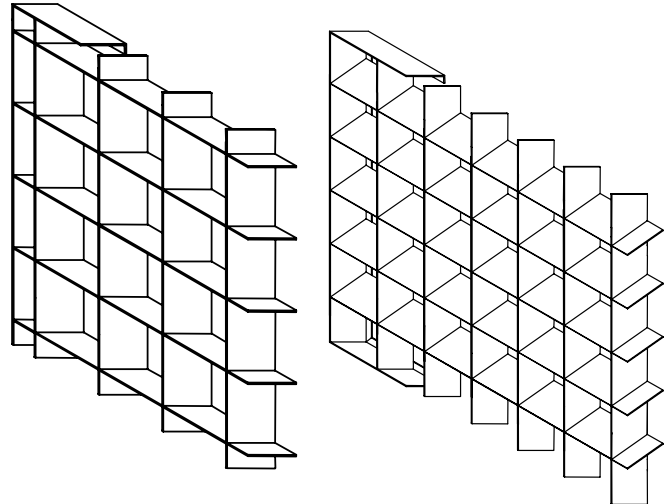


OPTIONAL CONSTRUCTION

- SPECIFIED MATERIAL** – Available in galvanized or stainless steel
- SCREEN** – Many styles available please consult screen listing
- FINISH** – Air-dry primer, polyurethane, epoxy, or enamel, baked epoxy or enamel, Anodized, Kynar, or Powder coat.


SPECIAL PURPOSE CONSTRUCTION

- Special shapes: Triangle, Round, Trapezoid, etc.
- Fully welded construction
- Security bars
- Hinged as walk through door or swing out access
- Filter racks
- Sleeved for ductwork connection


TYPICAL SCREEN STYLES



Expanded Aluminum
Standard



Wire Mesh

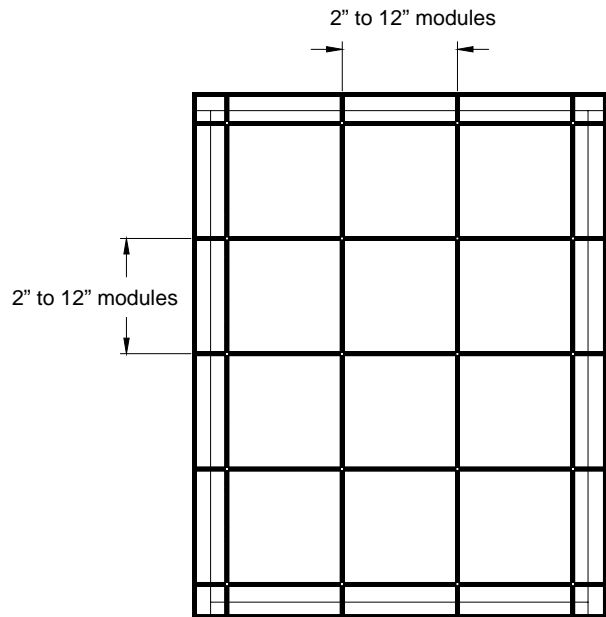

FRONT ELEVATION

DATE	ARCHITECT	CUSTOMER		
PROJECT				
ITEM	QTY	W	H	DESCRIPTION



DEPENDABLE PRODUCTS SINCE 1955

SAFE-AIR/DOWCO

Engineering and General Offices

1855 South 54th Avenue, Cicero, Illinois 60804

Phone 708-652-9100 FAX 708-652-9158