

**Extruded Aluminum Low Leakage, Low Pressure Drop Damper – Model 600**

**Design Features** – Strong blade design that can satisfy high-level system requirements (up to 8” static pressure and 3000 fpm for dampers less than 36” wide), with minimal flow through system loss, while maintaining very low leakage while in the closed position.

**STANDARD CONSTRUCTION**  
EXTRUDED ALUMINUM 6063-T5

**FRAME**

5.5” Deep, .125 extruded aluminum

**BLADES**

6” Wide, .081” extruded aluminum airfoil  
(Bottom blade width may vary depending on damper height)

**BLADE AXLES & BEARINGS**

AXLE – 7/16” Continuous steel plated hex  
BEARING – Bronze oil impregnated

**SEALS**

Silicone blade edge & aluminum jamb seals

**LINKAGE**

Pleated steel concealed inside of jamb.

**MAXIMUM SIZE**

Unlimited, with mullions, structural bracing supplied by others  
(Multi-section sizes usually require jackshaftering)

**MAXIMUM SINGLE SECTION**

60”W x 96”H

**MINIMUM SIZE**

6”W x 9”H

**UNDERSIZED**


1/4” under ordered size unless specified Exact or Actual

**FINISH**


Mill

**OPERATOR**

None, 6” extended driving shaft

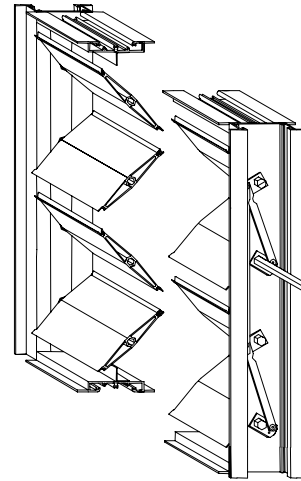

Opposed Blade

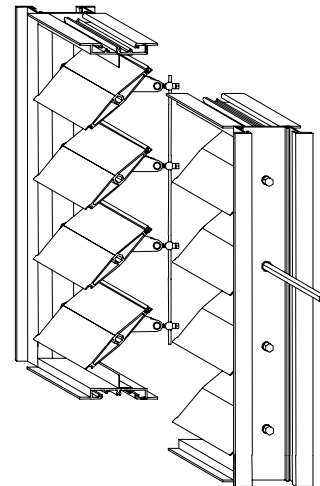

Parallel Blade

**OPTIONAL CONSTRUCTION**

**SPECIFIED MATERIAL** – Available in galvanized or stainless steel

**SCREEN:** Many styles available please consult screen listing

**JAMB SEALS** – Stainless steel

**SLEEVE AND DUCTWORK CONNECTION** – 10 ga. to 20 ga. galvanized steel to 30” in length. – Transitions available in; round, oval, rectangular, or custom. Factory can install access door, retaining angles, and flange connections.

**FINISH** – Air-dry primer, polyurethane, epoxy, or enamel, baked epoxy or enamel, Kynar, or Powder coat.

**OPERATOR** – Manual, electric or pneumatic, internally and externally mounted, or jackshaftered. Please consult operator listing.


**SPECIAL PURPOSE CONSTRUCTION**

- Fully welded construction
- Security bar
- Filter racks


DATE	ARCHITECT			CUSTOMER
PROJECT				
ITEM	QTY	W	H	DESCRIPTION

All tests performed at an independent laboratory and based on AMCA's standard 500-D for Air Performance, Air Leakage, and Free Area.

**AIR PERFORMANCE (24" x 24")**

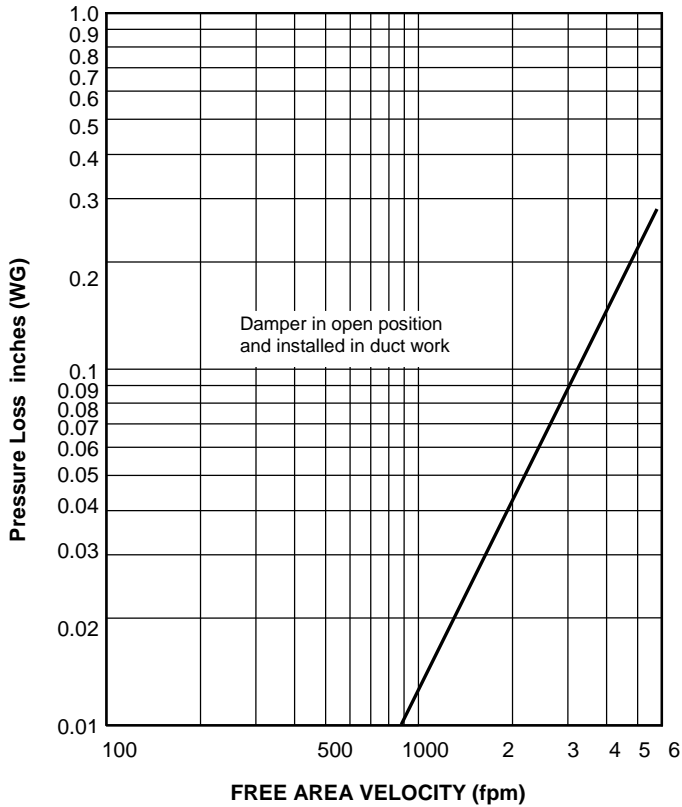

**AIR LEAKAGE (48" x 48")**

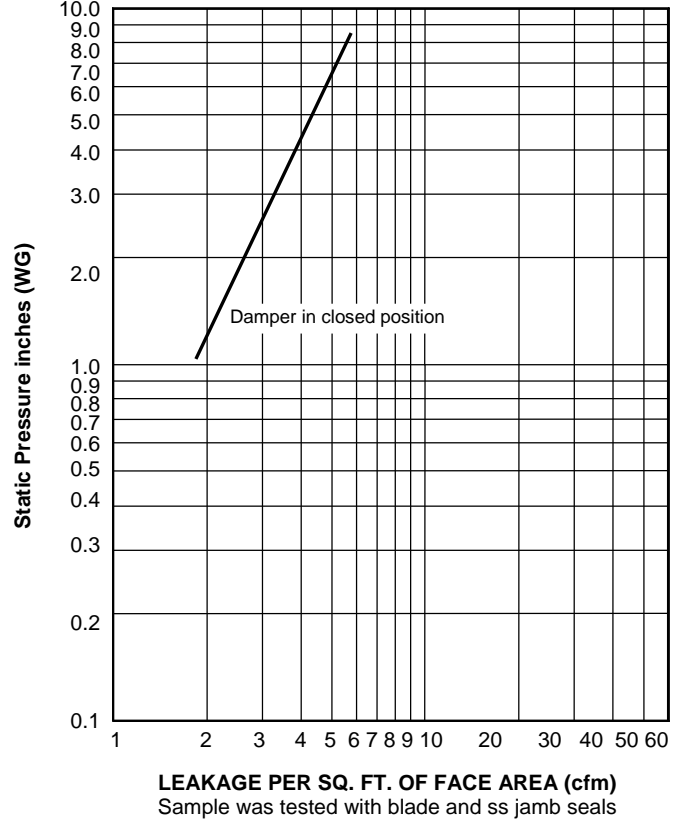

**CALCULATING PRESSURE LOSS:**

Based upon a given flow rate (in CFM), the flowing pressure loss may be determined from the "air performance graph, knowing the sq. ft. of free area of the damper. Alternately, the free area may be determined based upon a volumetric flow rate and a maximum pressure loss. Utilizing the "air performance" graph.

\_\_\_\_\_ in. W.C. Max. Pressure Loss Intake or Exhaust

\_\_\_\_\_ FPM (Free Area Velocity From "Air Performance" Graph)

\_\_\_\_\_ CFM / \_\_\_\_\_ FPM Free Area Velocity = \_\_\_\_\_ Sq. Ft. Free Area

**FREE AREA CALCULATIONS IN SQ. FT.**

		WIDTH									
Inches		12	16	20	24	28	32	36	40	44	48
HEIGHT	12	0.58	0.81	1.03	1.26	1.49	1.72	1.95	2.17	2.40	2.63
	16	0.86	1.20	1.54	1.88	2.22	2.56	2.89	3.23	3.57	3.91
	20	1.09	1.53	1.96	2.39	2.82	3.26	3.69	4.12	4.55	4.99
	24	1.33	1.86	2.38	2.91	3.43	3.96	4.49	5.01	5.54	6.06
	28	1.61	2.25	2.89	3.52	4.16	4.80	5.43	6.07	6.71	7.34
	32	1.85	2.58	3.31	4.04	4.77	5.50	6.23	6.96	7.69	8.42
	36	2.08	2.91	3.73	4.55	5.38	6.20	7.02	7.85	8.67	9.49
	40	2.37	3.30	4.23	5.17	6.10	7.04	7.97	8.91	9.84	10.78
	44	2.60	3.63	4.66	5.68	6.71	7.74	8.77	9.80	10.82	11.85
	48	2.84	3.96	5.08	6.20	7.32	8.44	9.56	10.69	11.81	12.93
	52	3.29	4.60	5.90	7.20	8.50	9.80	11.10	12.41	13.71	15.01
	56	3.36	4.68	6.01	7.33	8.66	9.98	11.31	12.63	13.96	15.29
	60	3.59	5.01	6.43	7.85	9.27	10.68	12.10	13.52	14.94	16.36
	64	3.87	5.40	6.93	8.46	9.99	11.52	13.05	14.58	16.11	17.64
68	4.11	5.73	7.35	8.98	10.60	12.22	13.85	15.47	17.09	18.72	
72	4.34	6.06	7.78	9.49	11.21	12.93	14.64	16.36	18.08	19.79	