

Aluminum Grilles (Stellars) - Model GBF-10 Series

STANDARD CONSTRUCTION

FRAME

2" (51) to 6" (152) deep, .080" (2.0) to .125" (3.1) thick formed aluminum (3003-H14)

BLADES

.080" (2.0) to .125" (3.1) thick formed aluminum or extruded aluminum, spacing - 2" to 12" modules.

MAXIMUM SIZE

Unlimited, structural bracing supplied by others

MAXIMUM FACTORY ASSEMBLY SIZE

60" x 120" (1524 x 3048) or vice versa

MINIMUM SIZE

12" x 12" (305 x 305)

FASTENERS:

Mechanical type and welded construction

SCREEN:


3/4" x .051" (19 x 1.3) flattened expanded aluminum birdscreen in extruded aluminum frame

UNDERSIZED

1/4" (6) under ordered size unless specified Exact or Actual

FINISH

Mill

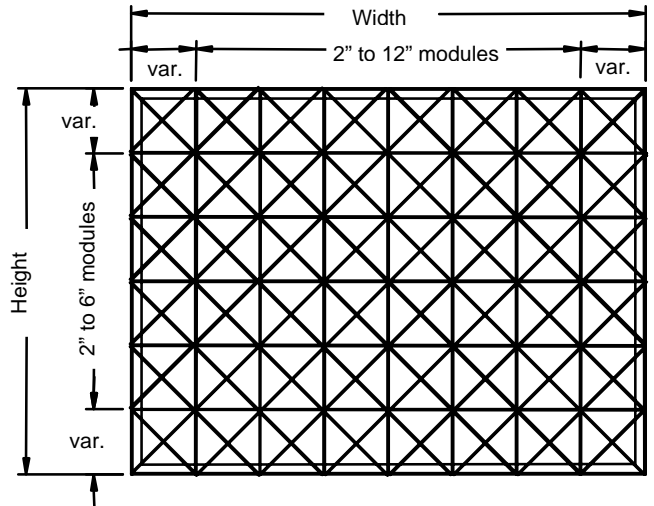

OPTIONAL CONSTRUCTION

SPECIFIED MATERIAL - Available in galvanized or stainless steel

SCREEN - Many styles available please consult screen listing

FINISH - Air-dry primer, polyurethane, epoxy, or enamel, baked epoxy or enamel, Anodized, Kynar, or Powder coat.

SPECIAL PURPOSE CONSTRUCTION

Special shapes: Triangle, Round, Trapezoid, etc.



Fully welded construction

Security bars

Hinged as walk through door or swing out access

Filter racks

Sleeved for ductwork connection

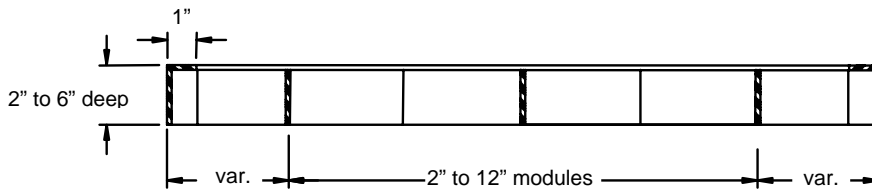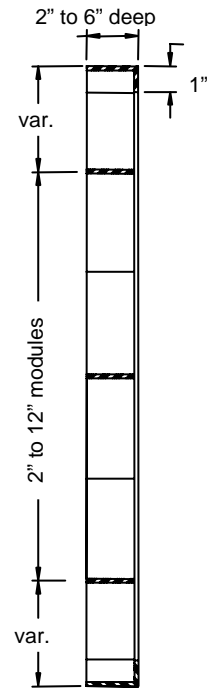

FRONT ELEVATION

| | | | | |
|---------|-----------|---|---|-------------|
| DATE | ARCHITECT | | | CUSTOMER |
| PROJECT | | | | |
| ITEM | QTY | W | H | DESCRIPTION |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |



DEPENDABLE PRODUCTS SINCE 1955

SAFE-AIR/DOWCO

Engineering and General Offices

1855 South 54th Avenue, Cicero, Illinois 60804

Phone 708-652-9100 FAX 708-652-9158