

Alumimum Grilles (Galatia) - Model GBF-15 series

STANDARD CONSTRUCTION

FRAME

2" to 6" deep, .080" to .125" thick formed aluminum (3003-H14)

BLADES

.080" to .25" thick formed aluminum or extruded aluminum, spacing - 2" to 12" modules @ 0 to 45 degrees slope.

MAXIMUM SIZE

Unlimited, structural bracing supplied by others

MAXIMUM FACTORY ASSEMBLY SIZE

60" x 120" or vice versa

MINIMUM SIZE

12" x 12"

FASTENERS:

Mechanical type and welded construction

SCREEN:


3/4" x .051" flattened expanded aluminum birdscreen in extruded aluminum frame

UNDERSIZED

1/4" under ordered size unless specified Exact or Actual

FINISH

Mill

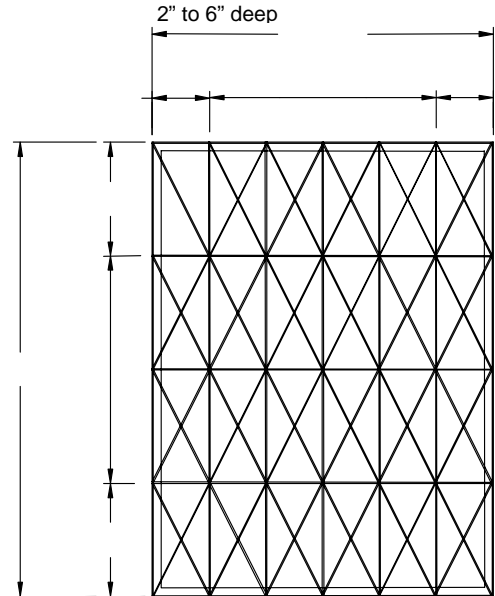

OPTIONAL CONSTRUCTION

SPECIFIED MATERIAL - Available in galvanized or stainless steel

SCREEN - Many styles available please consult screen listing

FINISH - Air-dry primer, polyurethane, epoxy, or enamel, baked epoxy or enamel, Anodized, Kynar, or Powder coat.

SPECIAL PURPOSE CONSTRUCTION

Special shapes: Triangle, Round, Trapezoid, etc.

Fully welded construction


Security bars

Hinged as walk through door or swing out access


Filter racks

Sleeved for ductwork connection

2" to 12" modules

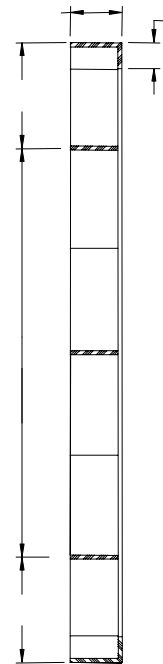

FRONT ELEVATION

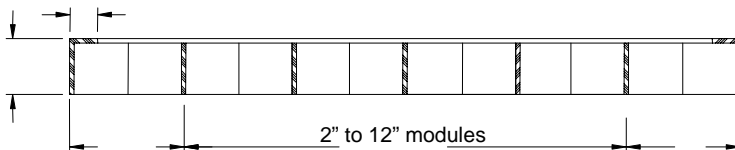

DATE	ARCHITECT			CUSTOMER
PROJECT				
ITEM	QTY	W	H	DESCRIPTION