

Extruded Aluminum Louvered Door

STANDARD CONSTRUCTION

SUB-FRAME

.125" thk. Formed aluminum alloy 3003-H14

LOUVER FRAME

.063/.081" thk. extruded aluminum, alloy 6063-T52

LOUVER BLADES

.063/.081" thk. extruded aluminum, alloy 6063-T52

CORNER REINFORCEMENT

6" x 6" x .125" thk. plate

PIANO HINGE

1/16" thk. x 4" wide electro galvanized steel continuous

HASP

Stainless steel hasp, padlock not included

SCREEN

Expanded aluminum screen in frame

THICKNESS (T)

1-3/8", 2", 4", 5" and 6"

MAXIMUM SIZE

48" x 96", larger size may require thicker sub-frame.

MINIMUM SIZE

24" x 36"

FINISH

Mill


OPTIONS

Material


Galvanized or Stainless steel Construction

FINISH


Kynar 500, Prime coat, Powder Coat, Baked Enamel, Anodized.

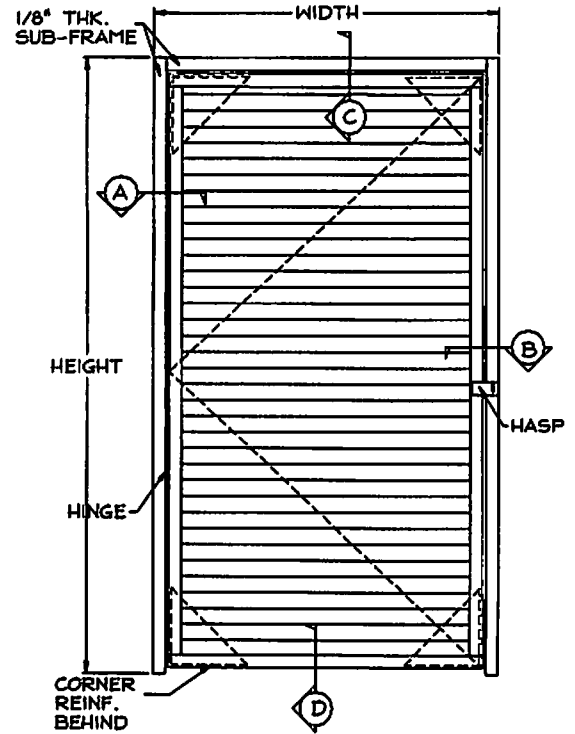

FRONT ELEVATION

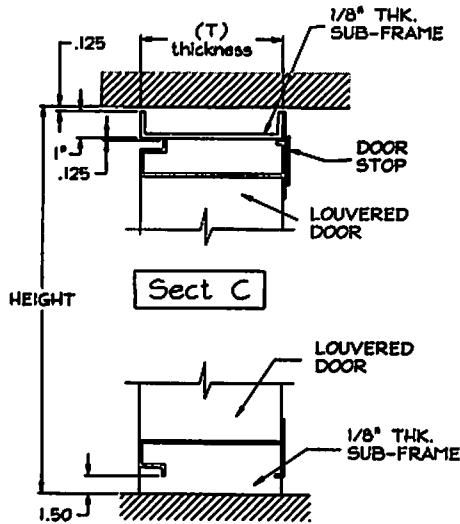

Sect D

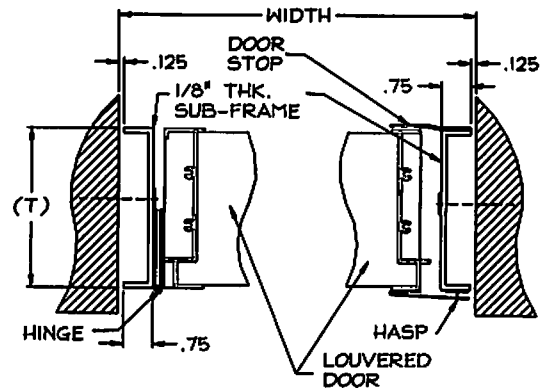

Sect A

Sect B

DATE	ARCHITECT			CUSTOMER
PROJECT				
ITEM	QTY	W	H	DESCRIPTION