




PLAN VIEW

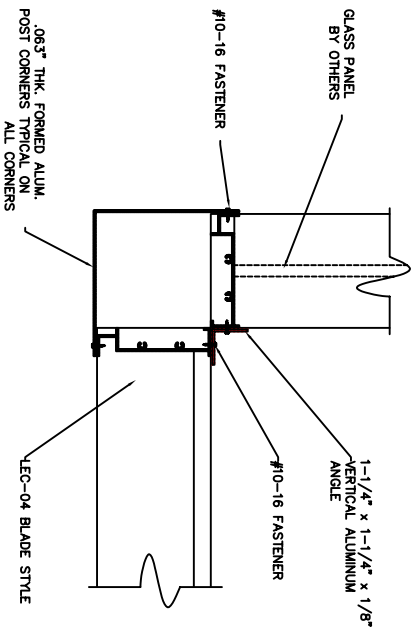

POST-CORNER DETAIL

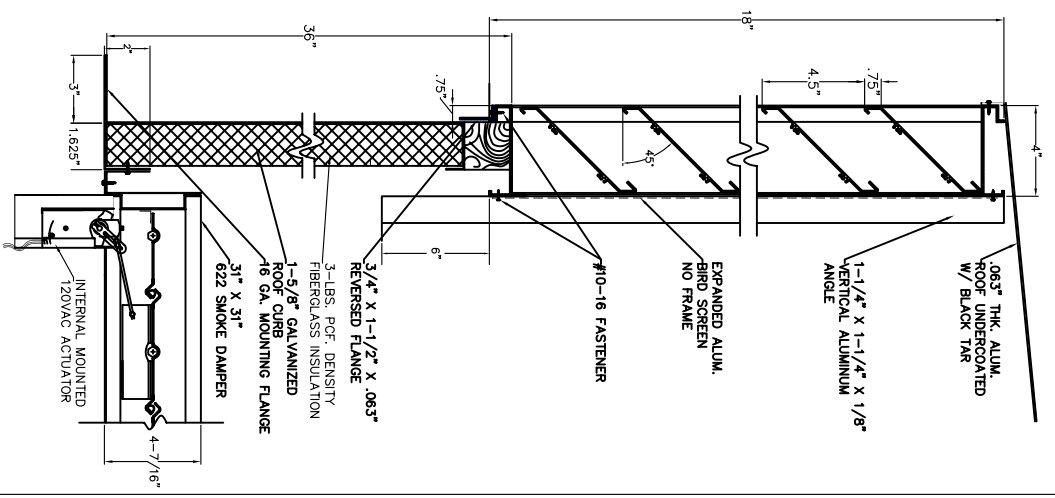

SECTION-A

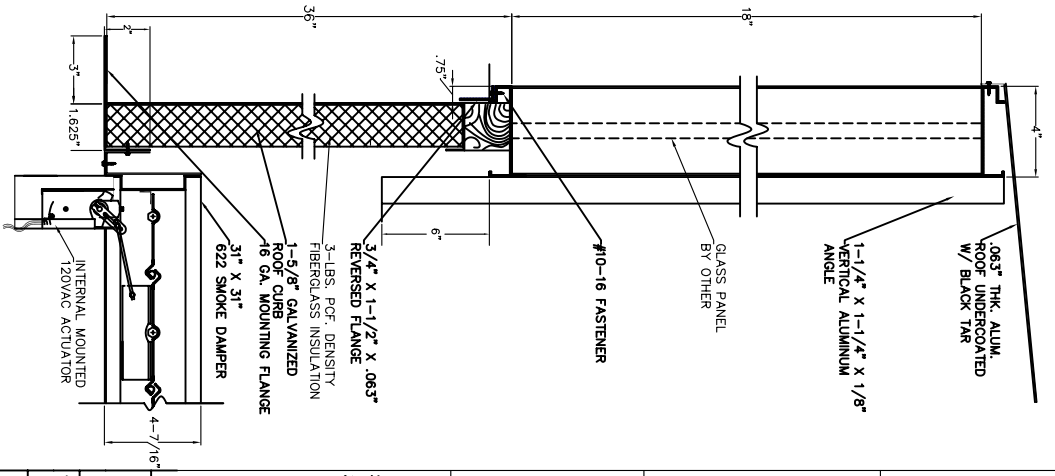

SECTION-B

STANDARD CONSTRUCTION

MODEL: P-LEC-04-X007-D
 FRAME: .081" THK. EXTRUDED ALUM. ALLOY
 6063-T52
 BLADES: .081" THK. EXTRUDED ALUM. ALLOY
 6063-T5, @ 45 DEGREES
 CORNERS: .063 THK. FORMED ALUM. ALLOY
 ROOF: .063 THK. FORMED ALUM. 5005-134
 UNDERCOATED WITH BLACK TAR
 SCREEN: EXP. ALUM. SCREEN NO FRAME
 FINISH: MILL

MODEL-622 CONSTRUCTION

MODEL: 622 - SMOKE DAMPER
 FRAME: 6" DIA. DEEP 16 GA. GALVANIZED STEEL
 BLADES: 7/16" DIA. GALVANIZED STEEL
 AXLES: 7/16" DIA. GALVANIZED STEEL
 BEARINGS: BRONZE OIL IMPREGNATED
 LINKAGE: PLATED STEEL CONCEALED INSIDE JAMB
 DRIVE: DRIVE BLADE SEALS AND S.S. SIDE SEALS
 ACTUATOR: SIEMENS G90-221, 120VAC

CURB CONSTRUCTION

MODEL: FRC-GS - ROOF CURB
 SHELL: 16 GA. GALVANIZED STEEL
 BASE: 16 GA. GALVANIZED STEEL
 WOOD NAILER: AS REQUIRED, FACTORY INSTALLED
 FASTENERS: WELDED CONSTRUCTION
 INSULATION: 3-LBS. PCF DENSITY FIBERGLASS
 THICKNESS: 1-5/8"

NOTES:

1. ALL LOUVERS TO BE FABRICATED 1/4" UNDER LISTED OPNG. SIZES UNLESS SPECIFIED "ACTUAL".
2. ALL OPNG. SIZES TO BE FIELD VERIFIED AND GUARANTEED BY OTHERS PRIOR TO FABRICATION.
3. OTHER CURB FINISHES ARE FOR REFERENCE ONLY AND TO BE SUPPLIED BY OTHERS.

PENTHOUSE SCHEDULE

TAG	QTY	OPENING SIZE (MM)	NOTES
	2	36" x 36" x 18"	3-SIDED LOUVER WALL 1-SIDE GLASS PANEL BY OTHERS



DEPENDABLE PRODUCTS SINCE 1965
 1865 SOUTH 54TH AVENUE, OCEANO, FL 33080
 CUSTOMER: ACES

PROJECT:		TITLE:	
RFO-NSCOT BLDG #5		P-LEC-04/SERIES	
DATE:	DRAWN: E.J.F	DATE:	DRAWN #
2/04/11	CHKD: JIN		D-5004 (1/1)
REV.	DESCRIPTION	DATE	BY